



**#1** SNOW PLOW MANUFACTURER  
Call us 1.866.362.1688



**[www.metalpless.com](http://www.metalpless.com)**

## PRODUCT FEATURES :

- Universal subframe exclusive to Metal Pless
- Double action hydraulics "Pression Maxx" exclusive to Metal Pless
- 180° multiple hydraulic side wing positions
- Side wings made from Heavy duty steel CHT400
- HD CHT400 steel multi-section mechanical trip edge ½" x 6"
- 3 adjustable crossover relief valves for hydraulic protection on the side wings and power angle system
- Self-leveling skid shoes on the wings made from CHT400 steel
- Wear plate welded to the skid shoes on the side wings
- Lateral floating of the blade
- Adjustable angulation of the blade
- Baked powder paint
- This system requires 4 sets of oil outlets

## OPTIONS :

- **SOFT drive** mechanical trip edge ( AgriMaxx HD)
- Silage application (includes deflector and hydraulic tilt)
- Tire saver
- ¾" x 6" teflon cutting edge
- Carbide cutting edge
- Non standard colour
- Nitrogen accumulator package installed on the up and down cylinder
- Electric valve and Joystick (electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cab)
- Curb runners




AgriMaxxLT



AgriMaxx standard



AgriMaxx HD

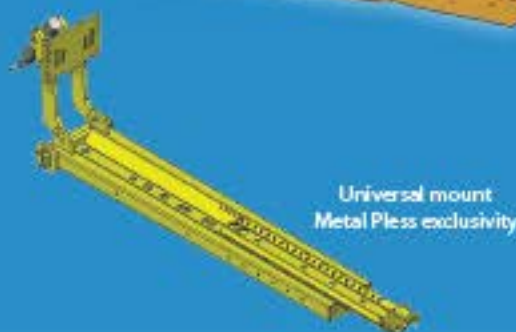

Universal mount  
Metal Pless exclusivity

## Some basics variations on blade positions



| Model        | Blade position & width |       |          | Height & width of the side wings | Application   | Approx. weight |
|--------------|------------------------|-------|----------|----------------------------------|---------------|----------------|
|              | Box                    | Scoop | Extended |                                  |               |                |
| AGLT0526-10  | 5'                     | 7'6"  | 10'      | 26" x 30"                        | 40 - 50 HP    | 800 lbs        |
| AGLT0626-11  | 6'                     | 8'6"  | 11'      | 26" x 30"                        | 50 - 60 HP    | 880 lbs        |
| AGLT0726-12  | 7'                     | 9'6"  | 12'      | 26" x 30"                        | 50 - 70 HP    | 960 lbs        |
| AGH0730-12   | 7'                     | 9'6"  | 12'      | 30"                              | 60 - 80 HP    | 1785 lbs       |
| AGH0830-13   | 8'                     | 10'6" | 13'      | 30"                              | 70 - 90 HP    | 2070 lbs       |
| AGH0736-13   | 7'                     | 10'   | 13'      | 36"                              | 60 - 90 HP    | 1875 lbs       |
| AGH0836-14   | 8'                     | 11'   | 14'      | 36"                              | 80 - 100 HP   | 2183 lbs       |
| AGH0936-15   | 9'                     | 12'   | 15'      | 36"                              | 90 - 125 HP   | 2279 lbs       |
| AGH0836-16 * | 8'                     | 12'   | 16'      | 36" x 48"                        | 90 - 125 HP   | 2375 lbs       |
| AGH1036-16   | 10'                    | 13'   | 16'      | 36"                              | 100 - 125 HP  | 2375 lbs       |
| AGH1236-18   | 12'                    | 15'   | 18'      | 36"                              | 100 - 125 HP  | 2590 lbs       |
| AGH1242-19   | 12'                    | 15'6" | 19'      | 42"                              | 125 HP and up | 2700 lbs       |

\* with subframe MKS2P

The width of the blade does not determine the real dimension of the product. Pictures might show options.

## PRODUCT FEATURES :

- Universal subframe exclusive to Metal Pless
- Double action hydraulics "Pression Maxx" exclusive to Metal Pless
- 180° multiple hydraulic side wing positions
- Side wing made from heavy duty steel CHT400
- **SOFT drive** mechanical steel trip edge heavy duty multi-section  $\frac{3}{4}$ " x 6" x 24"
- **SOFT drive** mechanical steel trip edge on the wings
- Double row of hydraulic cylinders on side wings to give extra strength
- 3 adjustable crossover relief valve for hydraulic protection on the side wings and power angle system
- Skid shoes (CHT400 steel) mounted to the back of the cutting edge
- Wear plate welded to the skid shoes on the side wings
- Lateral floating of the blade
- Adjustable angulation of the blade
- Baked powder paint
- This system requires 3 or 4 sets of oil outlets



## OPTIONS :

- HighSpeed (Accentuated curve of the mouldboard)
- 3 point hitch attachment
- Curb runners
- Carbide cutting edge
- Non standard colour
- Nitrogen accumulator package installed on the up and down cylinder
- Electric valve and Joystick (Electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cab)



**SOFT drive** trip edge exclusivity Metal Pless  
Trip edge softly cushions plow responses when the plow hits an obstacle for soft rides



HighSpeed



Universal mount  
Metal Pless exclusivity

## Some basics variations on blade positions



| Model      | Blade position & width |       |          | Height & width of the side wings | Application | Approx. weight |
|------------|------------------------|-------|----------|----------------------------------|-------------|----------------|
|            | Box                    | Scoop | Extended |                                  |             |                |
| CT1048-18  | 10'                    | 14'   | 18'      | 48"                              | 100 HP & up | 3100 lbs       |
| *CT1048-20 | 10'                    | 15'   | 20'      | 48" x 60"                        | 100 HP & up | 3350 lbs       |
| CT1248-20  | 12'                    | 16'   | 20'      | 48"                              | 125 HP & up | 3400 lbs       |
| *CT1248-22 | 12'                    | 17'   | 22'      | 48" x 60"                        | 125 HP & up | 3630 lbs       |

\*Available only for tractors with a 3 point hitch in front

**CITY MAXX**

### PRODUCT FEATURES :

- Universal subframe exclusive to Metal Pless
- Double action hydraulics "Pression Maxx" exclusive to Metal Pless
- 180° multiple hydraulic side wing positions
- Side wings made from heavy duty steel CHT400
- **SOFT drive** mechanical steel trip edge heavy duty multi-section ½" x 6"
- **SOFT drive** mechanical steel trip edge on the wings
- Self leveling skid shoes on the wings made from CHT400 steel
- 3 adjustable crossover relief valves for hydraulic protection on the side wing and power angle system
- Skid shoes made from CHT400 steel mounted to the back of the cutting edge
- Lateral floating of the blade
- Adjustable angulation of the blade
- Baked powder paint
- This system requires 5 sets of oil outlets

### OPTIONS :

- Tire saver
- Curb runners
- 3 point attachment
- Carbide cutting edge
- Non standard colour
- Nitrogen accumulator package installed on the up and down cylinder
- Electric valve and Joystick



Universal mount  
Metal Pless exclusivity

### Some basics variations on blade positions



| Model      | Blade position & width |                |                | Height & width of the side gate | Application  | Approx. weight |
|------------|------------------------|----------------|----------------|---------------------------------|--------------|----------------|
|            | Box                    | Extension only | Fully extended |                                 |              |                |
| EXT0736-17 | 7'                     | 11'            | 17'            | 36"                             | 80 - 100 HP  | 2500 lbs       |
| EXT0836-19 | 8'                     | 13'            | 19'            | 36"                             | 80 - 100 HP  | 2866 lbs       |
| EXT1036-21 | 10'                    | 15'            | 21'            | 36"                             | 100 - 125 HP | 3075 lbs       |

## PRODUCT FEATURES :

- Hydraulic extension on each side
- Bolt-on fixed side wings
- Heavy duty CHT400 steel cutting edge ½" x 6"
- Self-leveling skid shoes on the wings made from CHT400 steel
- Full tripping system of the blade with four (4) springs
- Lateral floating of the blade
- Flow "divider" to make the extensions go out and back in simultaneously
- HD brace bolted to the main mouldboard and to the side wings
- Baked powder paint
- This system requires 1, 2 or 3 sets of oil outlets;  
1 set for extensions, 1 set for power angle and 1 set for the up and down cylinder

## OPTIONS :

- Manual side wing 180° on hinges
- Non standard colour

Picture 1



Picture 2



Picture 3



Picture 4



Picture 1 : Front blade with harness and power angle position  
Picture 2 : Front blade for loader without power angle  
Picture 3 : Front blade that pulls backward with harness without power angle  
Picture 4 : Rear blade on 3 point hitch that pulls

| Model    | Height | Blade width |          | Approx. weight |
|----------|--------|-------------|----------|----------------|
|          |        | Box         | Extended |                |
| EX4/6-10 | 24"    | 6'          | 10'      | 904 lbs        |
| EX4/7-12 | 30"    | 7'          | 12'      | 1610 lbs       |
| EX4/8-13 | 36"    | 8'          | 13'      | 2205 lbs       |
| EX4/8-14 | 42"    | 8'          | 14'      | 2700 lbs       |



Front blade with power angle

**EXTENDMAXX<sup>EX4</sup>**



#### PRODUCT FEATURES :

- 180° multiple hydraulic side wing positions
- Side wings made from heavy duty steel CHT400
- **SOFT drive** mechanical steel trip edge heavy duty multi-section ¾" x 6" x 24"
- **SOFT drive** mechanical steel trip edge on the wings
- Double row of hydraulic cylinders on side wings to give extra strength
- Adjustable angulation of the blade
- Female quick attach
- 3 adjustable crossover relief valves for hydraulic protection on the side wings and power angle system
- Lateral floating of the blade
- Skid shoes made from CHT400 steel mounted on the back of the cutting edge
- Adjustable HD skid shoe mounted on the coupler attachment
- Curb runners
- Electric valve and joystick (Electric over hydraulic, 5 spools mounted on the blade, electric control and necessary cable for the installation in the loader cab)
- Baked powder paint
- This system requires 1 set of oil outlets

#### OPTIONS :

- Carbide cutting edge
- Non standard colour



**SOFT drive** trip edge exclusivity Metal Pless

Trip edge softly cushions plow responses when the plow hits an obstacle for soft rides

#### Some basics variations on blade positions



| Model       | Blade position & width |                |                | Height | Approx. weight |
|-------------|------------------------|----------------|----------------|--------|----------------|
|             | Box                    | Extension only | Fully extended |        |                |
| EXHD1048-23 | 10'                    | 15'            | 23'            | 48"    | 6490 lbs       |
| EXHD1248-29 | 12'                    | 19'            | 29'            | 48"    | 7500 lbs       |

The width of the blade does not determine the real dimension of the product. Pictures might show options.

**PATENTED**



**PRODUCT FEATURES :**

- "Live Edge" soft drive mechanical steel trip edge heavy duty multi-section 6" X ¾" X 24"
- Mobile steel trip edge following the imperfection of roads, exclusive Metal Pless system reduces by 50% the use of salt and abrasive
- Bold-on fixed side wings
- Self-leveling skid shoes on the wings made from CHT400 steel
- Lateral floating of the blade
- Wear plate welded on the skid shoe
- Heavy duty braces bolted to the mouldboard and to the side wings
- Baked powder paint

**OPTIONS :**

- Quick attach
- Carbide cutting edge
- Non standard colour



| Model   | Width | Dimensions |                 | Approx. weight |
|---------|-------|------------|-----------------|----------------|
|         |       | Height     | Side gate width |                |
| LBX0836 | 8'    | 36"        | 36"             | 1470 lbs       |
| LBX1036 | 10'   | 36"        | 36"             | 1700 lbs       |
| LBX1236 | 12'   | 36"        | 36"             | 1935 lbs       |
| LBX1436 | 14'   | 36"        | 36"             | 2175 lbs       |
| LBX1242 | 12'   | 42"        | 42"             | 2565 lbs       |
| LBX1442 | 14'   | 42"        | 42"             | 2805 lbs       |
| LBX1642 | 16'   | 42"        | 42"             | 3045 lbs       |
| LBX1842 | 18'   | 42"        | 42"             | 3285 lbs       |

**LIVE  
BOXX**

# MAXXPRO



## PRODUCT FEATURES :

- **SOFT drive** mechanical steel trip edge heavy duty multi-section ¾" x 6" x 24"
- **SOFT drive** mechanical steel trip edge on the wings
- Self leveling skid shoes on the wings made from CHT400 steel
- 180° multiple hydraulic side wing positions
- Side wings made from heavy duty steel CHT400
- Double row of hydraulic cylinders on side wings to give extra strength
- 3 adjustable crossover relief valve for hydraulic protection on the side wings and power angle system
- Lateral floating of the blade
- Skid shoes (CHT400 steel) mounted on the back of the cutting edge
- Female quick attach
- Wear plate welded to the skid shoes on the side wings
- Curb runners
- Adjustable HD skid shoe mounted on the coupler attachment
- Valve and joystick 3 functions
- Baked powder paint
- This system requires 1 set of oil outlets



## OPTIONS :

- Power angle max. 102° only available on 10' models
- Carbide cutting edge
- Non standard colour

### Some basics variations on blade positions



| Model      | Blade position & width |       |          | Height & side gate width | Approx. weight |
|------------|------------------------|-------|----------|--------------------------|----------------|
|            | Box                    | Scoop | Extended |                          |                |
| PRO1048-18 | 10'                    | 13'6" | 18'      | 48" x 48"                | 4352 lbs       |
| PRO1048-20 | 10'                    | 15'   | 20'      | 48" x 60"                | 4527 lbs       |
| PRO1248-20 | 12'                    | 16'   | 20'      | 48" x 48"                | 4657 lbs       |
| PRO1248-22 | 12'                    | 17'   | 22'      | 48" x 60"                | 4832 lbs       |
| PRO1448-25 | 14'                    | 19'6" | 25'      | 48" x 66"                | 5086 lbs       |
| PRO1648-30 | 16'                    | 23'   | 30'      | 48" x 84"                | 5514 lbs       |

The width of the blade does not determine the real dimension of the product. Pictures might show options.



## PRODUCT FEATURES :

- **SOFT drive** mechanical steel trip edge heavy duty multi-section ½" x 6"
- 180° multiple hydraulic side wing positions
- Side wings made from heavy duty steel CHT400
- 3 adjustable crossover relief valve for hydraulic protection on the side wings and power angle system
- **SOFT drive** mechanical steel trip edge on wings
- Front blade deflector
- Lateral floating of the blade
- Adjustable angulation of the blade
- Electric 12 volts central console for the operator with a 4 fonctions Joystick
- Electric power unit 12 volts
- Quick attach system with two headlights installed on blade
- Baked powder paint

## OPTIONS :

- Carbide cutting edge
- Non standard colour
- Nitrogen accumulator package installed on the up and down cylinder
- Hudraulic pump with electric clutch (12 volts)



Some basics variations on blade positions



| Model     | Blade position & width |       |          | Height & width of the side wings | Application              | Approx. weight |
|-----------|------------------------|-------|----------|----------------------------------|--------------------------|----------------|
|           | Box                    | Scoop | Extended |                                  |                          |                |
| PU0828-13 | 8'                     | 10'6" | 13'      | 28"                              | F350 or equivalent       | 1500 lbs       |
| PU0928-14 | 9'                     | 11'   | 14'      | 28"                              | F350 or equivalent       | 1740 lbs       |
| PU0836-14 | 8'                     | 11'   | 14'      | 36"                              | F450, F550 or equivalent | 1785 lbs       |
| PU0936-15 | 9'                     | 12'   | 15'      | 36"                              | F450, F550 or equivalent | 2070 lbs       |



The width of the blade does not determine the real dimension of the product. Pictures might show options.

PICKUPMAXX



### PRODUCT FEATURES :

- 180° multiple hydraulic side wing positions
- Side wings made from heavy duty steel CHT400
- Heavy duty CHT400 steel multi-section mechanical trip edge ½" x 6"
- 3 adjustable crossover relief valves for hydraulic protection on the side wings and power angle system
- Self-leveling skid shoes on the wings made from CHT400 steel
- Lateral floating of the blade
- Adjustable angulation of the blade
- Triple electric valve selector kit
- Baked powder paint
- This system requires 1 set of oil outlets

### OPTIONS :

- **SOFT drive** mechanical steel trip edge (PlowMaxx HD)
- Teflon cutting edge ¾" x 6"
- Carbide cutting edge
- Curb runners
- Non standard colour
- Quick attach
- 8 button joystick and electric valve (operate all 8 functions by the press of a button) (electric over hydraulic 3 spools mounted on the blade with electric control and necessary cable for the installation in the tractor cab)



PlowMaxxHD



### Some basics variations on blade positions



| Model       | Blade position & width |       |          | Height & side gate width | Approx. weight |
|-------------|------------------------|-------|----------|--------------------------|----------------|
|             | Box                    | Scoop | Extended |                          |                |
| PLSS0630-11 | 6'                     | 8'6"  | 11'      | 30"                      | 1500 lbs       |
| PLSS0730-12 | 7'                     | 9'6"  | 12'      | 30"                      | 1785 lbs       |
| PLSS0830-13 | 8'                     | 10'6" | 13'      | 30"                      | 2070 lbs       |
| PLBH0736-13 | 7'                     | 10'   | 13'      | 36"                      | 2085 lbs       |
| PLBH0836-14 | 8'                     | 11'   | 14'      | 36"                      | 2183 lbs       |
| PLBH0936-15 | 9'                     | 12'   | 15'      | 36"                      | 2279 lbs       |
| PLBH0836-16 | 8'                     | 12'   | 16'      | 36" x 48"                | 2375 lbs       |
| PLBH1036-16 | 10'                    | 13'   | 16'      | 36"                      | 2375 lbs       |
| PLBH1236-18 | 12'                    | 15'   | 18'      | 36"                      | 2550 lbs       |
| PLLD0842-15 | 8'                     | 11'6" | 15'      | 42"                      | 2300 lbs       |
| PLLD1042-17 | 10'                    | 13'6" | 17'      | 42"                      | 2500 lbs       |
| PLLD1242-19 | 12'                    | 15'6" | 19'      | 42"                      | 2700 lbs       |

The width of the blade does not determine the real dimension of the product. Pictures might show options.

## PRODUCT FEATURES :

- Adjustable angulation of the blade
- Heavy duty CHT400 steel cutting edge  $\frac{1}{2}$ " x 6"
- Full tripping system of the blade (*PLjr models only*)
- Heavy duty multi-section mechanical trip edge  $\frac{1}{2}$ " x 6" (*PLSO models only*)
- Adjustable crossover relief valve for hydraulic protection
- Lateral floating of the blade
- Baked powder paint
- This system requires 1 set of oil outlets

## OPTIONS :

- **SOFT drive** mechanical steel trip edge
- Teflon cutting edge  $\frac{3}{4}$ " x 6"
- Carbide cutting edge
- Non standard colour
- Quick attach



| Model     | Width | Height | Application | Approx. weight |
|-----------|-------|--------|-------------|----------------|
| PLjr525   | 5'    | 25"    | 30 - 40 HP  | 460 lbs        |
| PLjr625   | 6'    | 25"    | 30 - 50 HP  | 500 lbs        |
| PLjr725   | 7'    | 25"    | 40 - 60 HP  | 560 lbs        |
| PLjr825   | 8'    | 25"    | 50 - 70 HP  | 635 lbs        |
| *PLSO730  | 7'    | 30"    | 60 - 70 HP  | 925 lbs        |
| *PLSO830  | 8'    | 30"    | 70 - 80 HP  | 975 lbs        |
| *PLSO930  | 9'    | 30"    | 80 - 90 HP  | 1025 lbs       |
| *PLSO1036 | 10'   | 36"    | 80 - 100 HP | 1650 lbs       |
| *PLSO1236 | 12'   | 36"    | 100 HP & up | 1950 lbs       |
| *PLSO1242 | 12'   | 42"    | 125 HP & up | 2375 lbs       |

The width of the blade does not determine the real dimension of the product. Pictures might show options.

PLOWMAXX JR

#### PRODUCT FEATURES :

- Extendable and reversible snow plow
- Lateral floating of the blade
- Heavy duty construction
- Floating skid shoe on the end gates
- Full tripping system of the blade
- Flow "divider" to make the extensions go out and back in at the same time
- Extension cutting edges are installed against the main blade cutting edges for a better quality in snow plowing
- Baked powder paint
- This system requires 1 or 2 sets of oil outlets

#### OPTIONS :

- Quick attach
- Teflon cutting edge  $\frac{3}{4}$ " x 6"
- Non standard colour
- Hydraulic hoses



| Model     | Blade position & width |          | Inside dimensions |       | Application | Approx. weight |
|-----------|------------------------|----------|-------------------|-------|-------------|----------------|
|           | Box                    | Extended | Height            | Depth |             |                |
| R3M5.5-9  | 5'6"                   | 9'       | 20"               | 20"   | 30-45 HP    | 850 lbs        |
| R3M6-10   | 6'                     | 10'      | 24"               | 24"   | 40-65 HP    | 1200 lbs       |
| R3M6.5-11 | 6'6"                   | 11'      | 24"               | 24"   | 65-80 HP    | 1390 lbs       |
| R3M7-12   | 7'                     | 12'      | 32"               | 24"   | 80-125 HP   | 2400 lbs       |
| R3M7.5-13 | 7'6"                   | 13'      | 32"               | 24"   | 125 HP & up | 2530 lbs       |

The width of the blade does not determine the real dimension of the product. Pictures might show options.

## PRODUCT FEATURES :

- 180° multiple hydraulic side wing positions
- Side wings made from heavy duty steel CHT400
- Heavy duty CHT400 steel multi-section mechanical trip edge ½" x 6"
- 2 adjustable crossover relief valves for hydraulic protection on the side wings
- Self-leveling skid shoes on the wings made from CHT400 steel
- Adjustable HD skid shoe mounted on the coupler attachment
- Lateral floating of the blade
- Electric double valve selector installed on the blade
- Baked powder paint
- This system requires 1 set of oil outlets

## OPTIONS :

- **SOFT drive** mechanical steel trip edge
- Silage application (includes deflector and hydraulic tilt)
- Teflon cutting edge ¾" x 6"
- Carbide cutting edge
- Curb runners
- Non standard colour
- Quick attach



| Model        | Blade position & width |       |          | Height & side gate width | Application  | Approx. weight |
|--------------|------------------------|-------|----------|--------------------------|--------------|----------------|
|              | Box                    | Scoop | Extended |                          |              |                |
| REVLT0526-10 | 5'                     | 7'6"  | 10'      | 26" x 30"                | 35 - 45 HP   | 800 lbs        |
| REVLT0626-11 | 6'                     | 8'6"  | 11'      | 26" x 30"                | 45 - 55 HP   | 870 lbs        |
| REVLT0726-12 | 7'                     | 9'6"  | 12'      | 26" x 30"                | 55 - 65 HP   | 950 lbs        |
| REVM0630-11  | 6'                     | 8'6"  | 11'      | 30"                      | 50 - 60 HP   | 1390 lbs       |
| REVM0730-12  | 7'                     | 9'6"  | 12'      | 30"                      | 60 - 80 HP   | 1625 lbs       |
| REVM0830-13  | 8'                     | 10'6" | 13'      | 30"                      | 70 - 90 HP   | 1887 lbs       |
| REVM0736-13  | 7'                     | 10'   | 13'      | 36"                      | 60 - 90 HP   | 1900 lbs       |
| REVM0836-14  | 8'                     | 11'   | 14'      | 36"                      | 80 - 100 HP  | 2000 lbs       |
| REVM0936-15  | 9'                     | 12'   | 15'      | 36"                      | 90 - 125 HP  | 2090 lbs       |
| REVM0836-16  | 8'                     | 12'   | 16'      | 36" x 48"                | 85 - 125 HP  | 2085 lbs       |
| REVM1036-16  | 10'                    | 13'   | 16'      | 36"                      | 100 - 125 HP | 2190 lbs       |
| REVM1236-18  | 12'                    | 15'   | 18'      | 36"                      | 125 HP & up  | 2300 lbs       |
| REVM1242-19  | 12'                    | 15'6" | 19'      | 42"                      | 125 HP & up  | 2500 lbs       |

## PRODUCT FEATURES :

- 180° multiple hydraulic side wing positions
- Side wings made from heavy duty steel CHT400
- Reinforced rubber edge ¾" x 6"
- 3 adjustable crossover relief valve for hydraulic protection on the side wings and power angle system
- Self-leveling rubber skid shoes on the wings
- Lateral floating of the blade
- Baked powder paint
- Electric valve selector installed on the blade
- This system requires 2 to 3 sets of oil outlets

## OPTIONS :

- Non standard colour
- Adjustable angulation of the blade
- Universal subframe exclusive to Metal Pless
- Electric valve and joystick
- Nitrogen accumulator package installed on the up & down cylinder
- Quick attach
- 3 point hitch attachment



## Some basics variations on blade positions



| Model      | Blade position & width |       |          | Height & width of the side wings | Application | Approx. weight |
|------------|------------------------|-------|----------|----------------------------------|-------------|----------------|
|            | Box                    | Scoop | Extended |                                  |             |                |
| RBX0626-11 | 6'                     | 8'6"  | 11'      | 26" x 30"                        | 40 - 60 HP  | 800 lbs        |
| RBX0730-13 | 7'                     | 10'   | 13'      | 30" x 36"                        | 60 - 80 HP  | 1150 lbs       |
| RBX0736-14 | 7'                     | 10'6" | 14'      | 36" x 42"                        | 60 - 90 HP  | 1395 lbs       |
| RBX0836-15 | 8'                     | 11'6" | 15'      | 36" x 42"                        | 90 - 125 HP | 1875 lbs       |



Reinforced rubber edge



3 point hitch attachment




Different types of quick attach available

### PRODUCT FEATURES :

- Heavy duty construction
- Double action hydraulics "Pression Maxx" exclusive to Metal Pless
- Heavy duty CHT400 steel mechanical steel trip edge ½" x 6"
- Adjustable angular system of the blade
- Adjustable crossover relief valve for hydraulic protection
- Lateral floating blade
- Baked powder paint
- This system requires 2 sets of oil outlets

### OPTIONS :

- Carbide cutting edge
- Non standard colour
- Joystick and valve

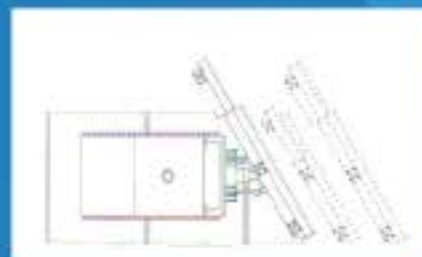

**SIDEMAXX**

| Model                                                                      | Dimension                                                                              |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| SM525                                                                      | Front blade 60" width x 25" height                                                     |
| Options                                                                    |                                                                                        |
| Option #1                                                                  | Heavy duty 18" hydraulic extension                                                     |
| Option #2                                                                  | Tilt 12" hydraulic pivot from up/down                                                  |
| Option #3                                                                  | Wheel out of true, 14" hydraulic sliding sideways (5" to the left and 9" to the right) |
| For option 1, 2 and 3 you need an additional set of oil outlets per option |                                                                                        |


# SIDEMAXXX

## PRODUCT FEATURES :

- Double action hydraulics "Pression Maxx" exclusive to Metal Pless
- Heavy duty steel trip edge ½" x 6"
- Adjustable angular system of the blade
- Adjustable crossover relief valve for hydraulic protection on the angular system
- Lateral floating of the blade
- Baked powder paint
- This system requires 3 sets of oil outlets

## OPTIONS :

- Carbide cutting edge
- Non standard colour
- Triple electric valve selector kit

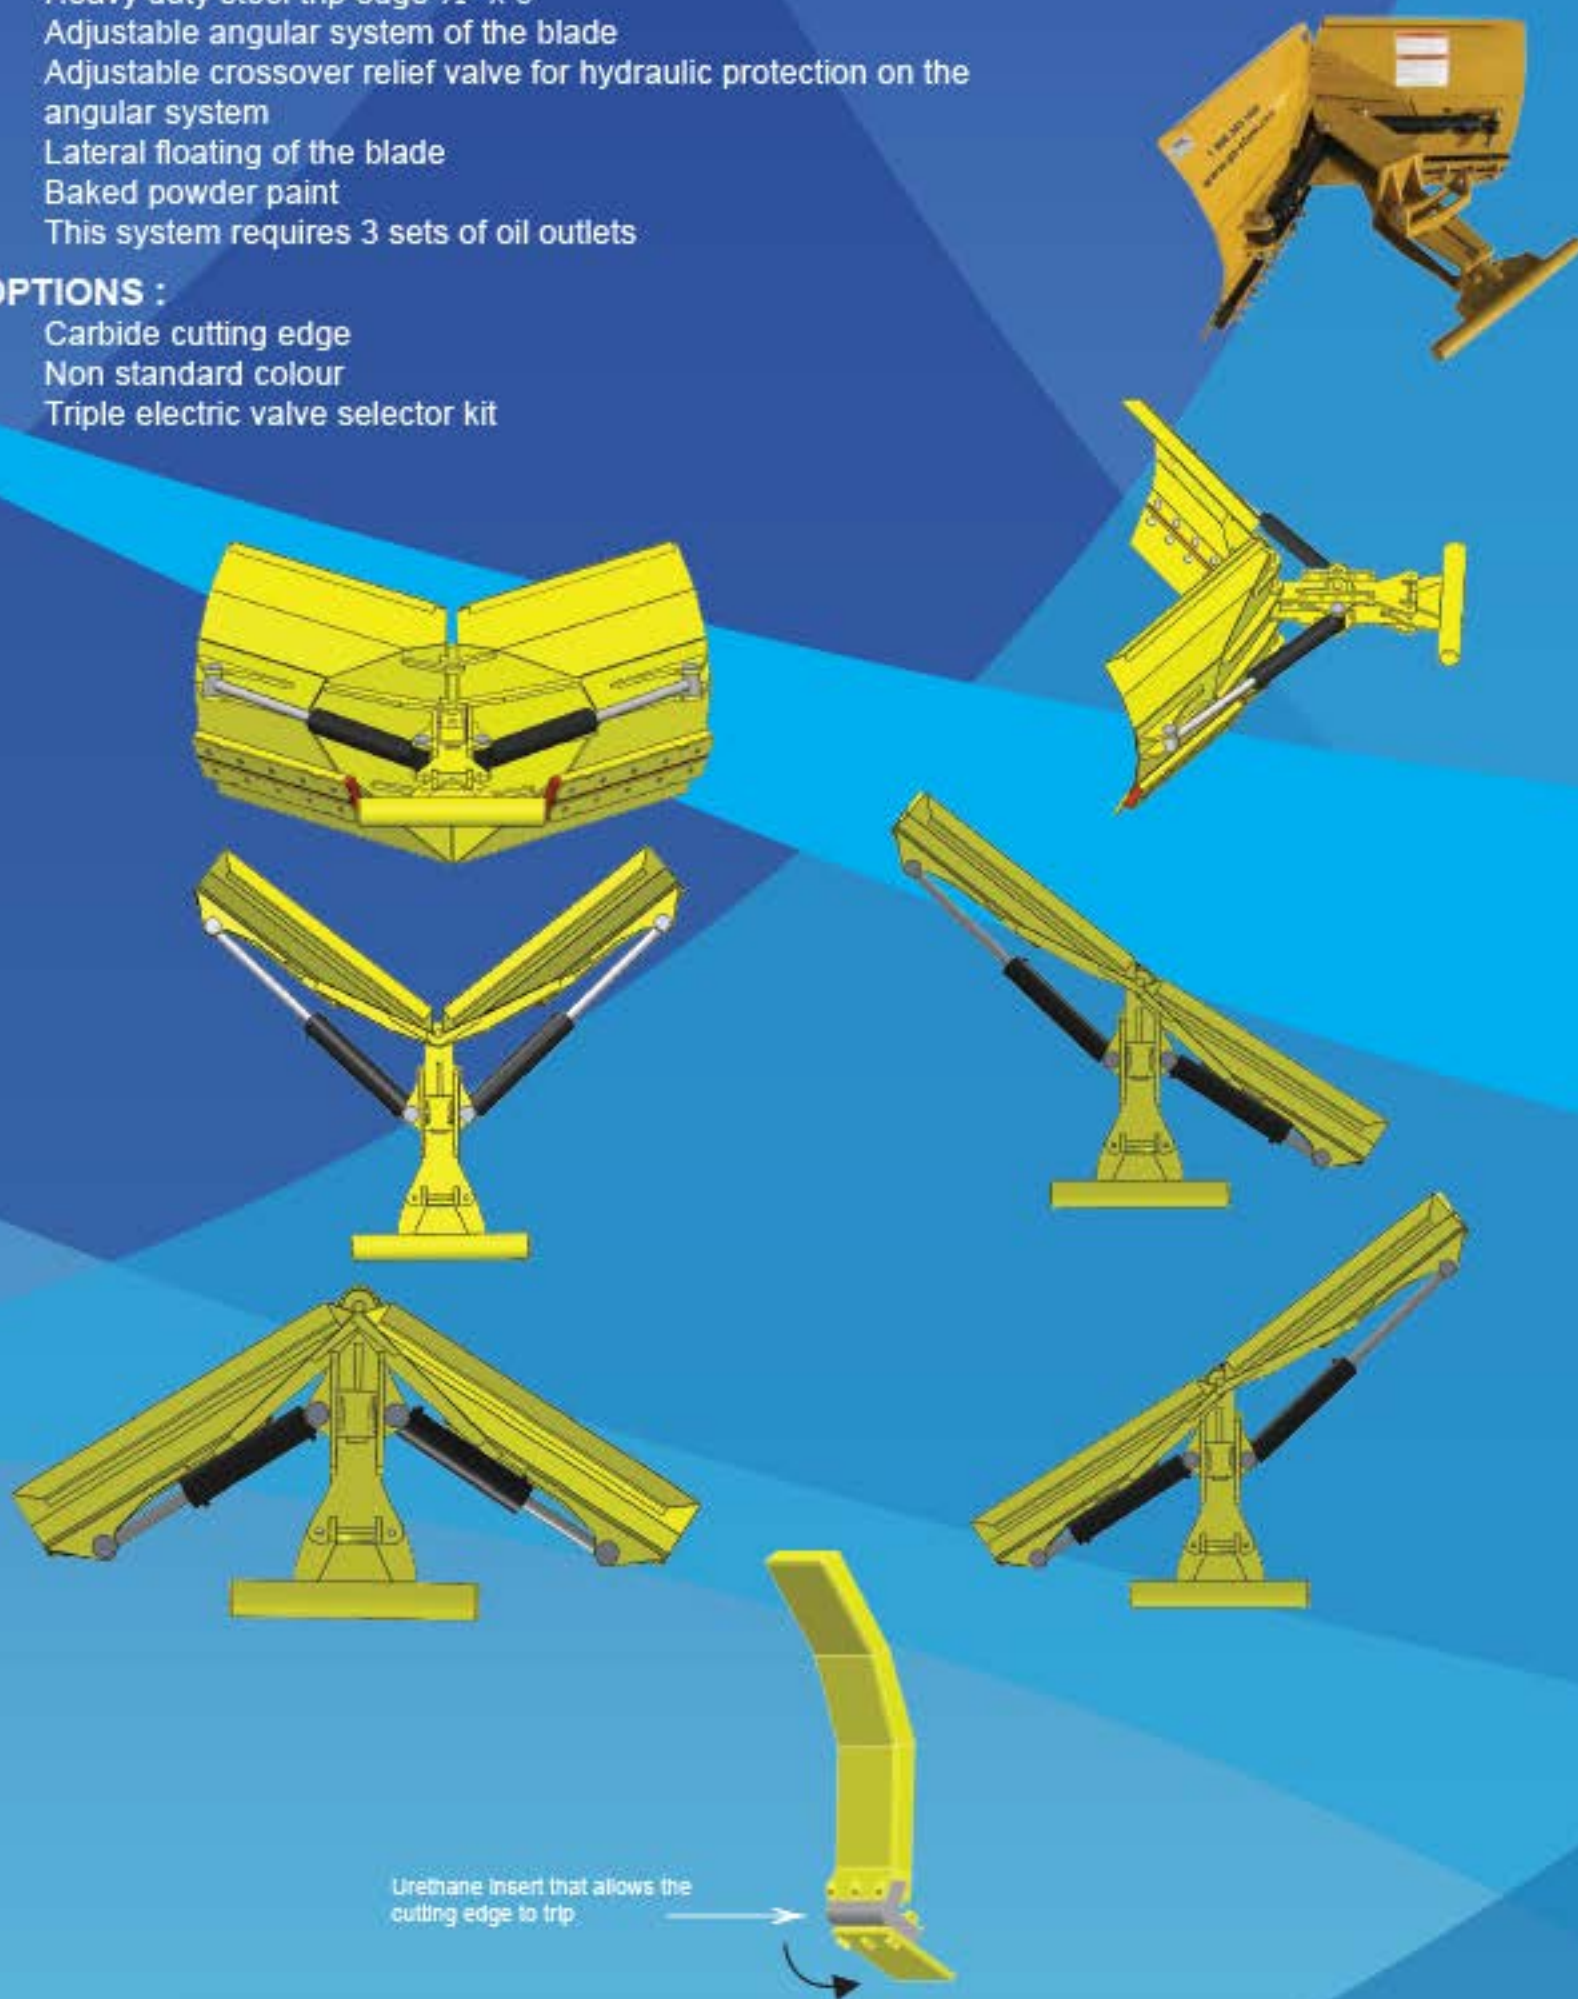

| Model  | Dimension |                  |        | Approx. weight |
|--------|-----------|------------------|--------|----------------|
|        | Straight  | Front & rear "V" | Height |                |
| SDX532 | 60"       | 48"              | 32"    | 800 lbs        |

The width of the blade does not determine the real dimension of the product. Pictures might show options.



### PRODUCT FEATURES :

- **SOFT drive** multi-section mechanical steel trip edge heavy duty CHT400 ½" x 6"
- Adjustable crossover relief valve for hydraulic protection on the power angle system
- Electric 12 volts central console for the operator with a 4 function joystick
- Hydraulic pump and electric clutch 12 volts (F550, F650 or equivalent)
- Quick attach system that requires only five minutes to remove the snow plow and the side wing from the truck
- Lateral floating of the blade
- Skid shoes mounted to the back of the cutting edge
- Front blade deflector
- Low profile side wing with deflector and **SOFT drive** trip edge
- Baked powder paint



LiveEdge option



### OPTIONS :

- "LiveEdge" soft drive mechanical carbide trip edge multi-section 6" x 3/4" x 24"
- Carbide cutting edge
- Non standard colour
- Nitrogen accumulator package installed on the up and down cylinder

| Model    | Front blade |        | Side wing |        | Application              | Approx. weight |
|----------|-------------|--------|-----------|--------|--------------------------|----------------|
|          | Width       | Height | Width     | Height |                          |                |
| TRK10-08 | 10'         | 30"    | 8'        | 30"    | F550, F650 or equivalent | N/A            |
| TRK10-09 | 10'         | 30"    | 9'        | 30"    | F550, F650 or equivalent | N/A            |
| TRK12-10 | 12'         | 42"    | 10'       | 36"    | 10 wheels truck          | N/A            |
| TRK12-11 | 12'         | 42"    | 11'       | 36"    | 10 wheels truck          | N/A            |
| TRK12-12 | 12'         | 42"    | 12'       | 36"    | 10 wheels truck          | N/A            |
| TRK12-14 | 12'         | 42"    | 14'       | 36"    | 10 or 12 wheels truck    | N/A            |





### PRODUCT FEATURES :

- Universal subframe exclusive to Metal Pless
- Double action hydraulics "Pression Maxx" exclusive to Metal Pless
- **SOFT drive** mechanical steel trip edge heavy duty CHT400 multi-section  $\frac{3}{4}$ " x 6" x 24"
- Adjustable crossover relief valve for hydraulic protection of the power angle system
- Front blade 12' x 42"
- Adjustable angulation of the blade
- Lateral floating of the blade
- Skid shoe mounted to the back of the cutting edge
- Front blade deflector
- Side wing deflector
- Baked powder paint
- This system requires 1 or 4 sets of oil outlets

### OPTIONS :

- HighSpeed (Highway plow)
- Carbide cutting edge
- Non standard colour
- Nitrogen accumulator package installed on the up and down cylinder
- Electric valve and Joystick (electric over hydraulic 4 spools mounted on the blade with electric control and necessary cable for the installation in the cab)



| Model     | Front blade |        | Side wing |        | Application | Approx. weight |
|-----------|-------------|--------|-----------|--------|-------------|----------------|
|           | Width       | Height | Width     | Height |             |                |
| WING12-08 | 12'         | 42"    | 8'        | 36"    | 125 HP & up | 3600 lbs       |
| WING12-09 | 12'         | 42"    | 9'        | 36"    | 125 HP & up | 3750 lbs       |
| WING12-10 | 12'         | 42"    | 10'       | 36"    | 125 HP & up | 3900 lbs       |



wingMaxx universal subframe

The width of the blade does not determine the real dimension of the product. Pictures might show options.

# MAXXEDGE<sub>MINI</sub>

## PRODUCT FEATURES :

- Mechanical HD steel trip edge single section ½" x 6"
- Wear plate welded to the skid shoes on the side wings
- Bold-on side panels
- Baked powder paint

## OPTIONS :

- Closed top (Reversible)
- Teflon cutting edge ¾" x 6"
- Non standard colour
- Quick attach



### MINI SERIE

| Model   | Dimensions |        | Application | Approx. weight |
|---------|------------|--------|-------------|----------------|
|         | Width      | Height |             |                |
| MSM0624 | 6'         | 24"    | 25 - 45 HP  | N/A            |
| MSM0724 | 7'         | 24"    | 25 - 45 HP  | N/A            |
| MSM0824 | 8'         | 24"    | 35 - 45 HP  | N/A            |
| MSM0630 | 6'         | 30"    | 45 - 80 HP  | N/A            |
| MSM0730 | 7'         | 30"    | 45 - 80 HP  | N/A            |
| MSM0830 | 8'         | 30"    | 45 - 80 HP  | N/A            |

# PUSHERMAXX<sub>MINI</sub>

## PRODUCT FEATURES :

- Steel cutting edge single section ½" x 6"
- Wear plate welded to the skid shoes on the side wings
- Bold-on side panels
- Baked powder paint

## OPTIONS :

- Closed top (Reversible)
- Teflon cutting edge ¾" x 6"
- Non standard colour
- Quick attach



### MINI SERIE

| Model   | Dimensions |        | Application | Approx. weight |
|---------|------------|--------|-------------|----------------|
|         | Width      | Height |             |                |
| PSM0624 | 6'         | 24"    | 25 - 45 HP  | N/A            |
| PSM0724 | 7'         | 24"    | 25 - 45 HP  | N/A            |
| PSM0824 | 8'         | 24"    | 35 - 45 HP  | N/A            |
| PSM0630 | 6'         | 30"    | 45 - 80 HP  | N/A            |
| PSM0730 | 7'         | 30"    | 45 - 80 HP  | N/A            |
| PSM0830 | 8'         | 30"    | 45 - 80 HP  | N/A            |

# COMPACT SERIE



### PRODUCT FEATURES :

- Double action hydraulic "Pression Maxx" for maximal pressure on the ground
- 6 hydraulic position plow to keep or throw aside as much snow as desired
- Adjustable tilt/float mouldboard feature to create path inclination when needed
- Robust 2 section steel trip edge tooth type ½" x 6"
- Adjustable crossover relief valve for hydraulic protection
- Baked powder paint
- This system requires 3 sets of oil outlets

### OPTIONS :

- 8 button joystick and electric valve (Electric over hydraulic 3 spools mounted on blade with electric control and necessary cable for installation in the tractor cab
- Non standard colour

| Model  | Width | Height | Approx. weight |
|--------|-------|--------|----------------|
| VM0725 | 7'    | 25"    | 1545 lbs       |
| VM0830 | 8'    | 30"    | 1580 lbs       |
| VM0930 | 9'    | 30"    | 1655 lbs       |
| VM1030 | 10'   | 30"    | 1730 lbs       |



Universal mount  
Metal Pless exclusivity

Exceptional quality of winter trails



#### PRODUCT FEATURES :

- Multiple adjustable mechanical trip edge to eliminate maximum oxygen in snow to make trails surface harder
- Leveling blades to set the snow
- Heavy duty frame
- Can be towed by different motorized vehicles
- Hydraulic adjustable rear finish tray
- Security lights
- Adjustable trip edge
- Built for all types of trail paths
- Hydraulic rear wheels for transport

#### OPTIONS :

- Universal 3 point hitch attachment
- Storage box 2' X 5' X 20"
- Attachment system




| Model      | Application       | Width | Length | Approx. weight |
|------------|-------------------|-------|--------|----------------|
| Groomer 8  | Tractor 50-80 HP  | 8'    | 16'    | N/A            |
| Groomer 9  | Tractor 80-140 HP | 9'    | 18'    | N/A            |
| Groomer 10 | Tractor 80-140 HP | 10'   | 20'    | N/A            |

## Attachment system

#### PRODUCT FEATURES :

- Easy driving
- Easy to maneuver in sharp turns
- No modification needed to the tractor
- Made out of heavy duty steel
- Standard color is black Metal Pless

| Model         |
|---------------|
| 4Track Attach |

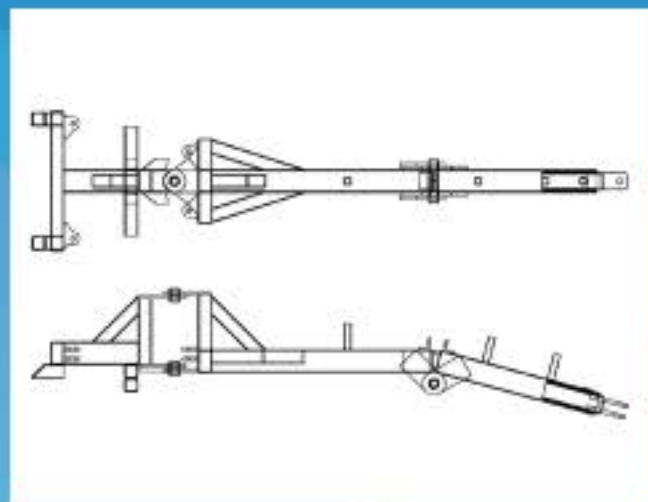

# METAL PLESS RANGE OF PRODUCTS

## AGRICULTURAL EQUIPMENTS




QualityPLUS



SupremePLUS



XtrailPLUS

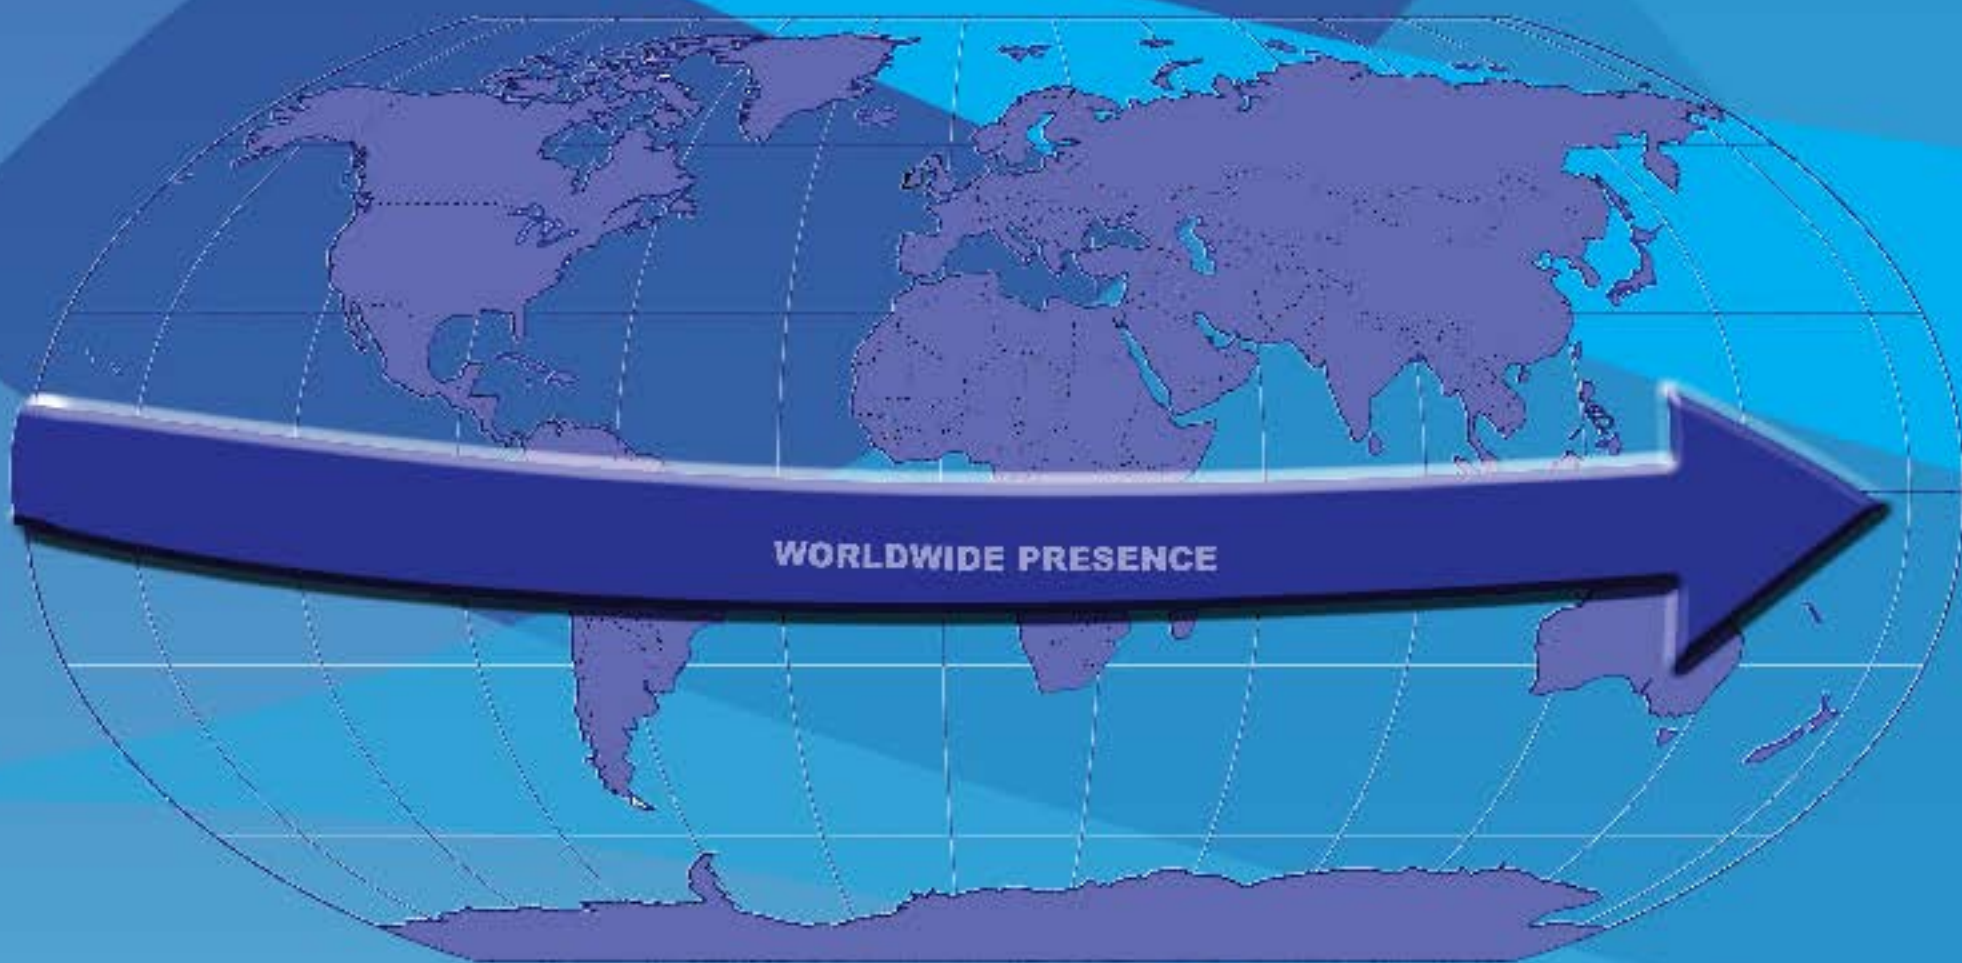

Distributor / Dealer

**METAL  
PLESS**

1683, Sucreries boulevard

Plessisville (Quebec)

Canada G6L 1W4

Phone : 819 362-2221

Toll free : 1 866 362-1688

Fax : 819 362-6974

Website : [www.metalpless.com](http://www.metalpless.com)

Email : [go@metalpless.com](mailto:go@metalpless.com)

